



CT30 & CT30P DESICCANT CARTRIDGE DRYERS

Order No.
130500
CT30
Wall Mount

Order No.
130501
CT30-P
Portable



Completely
portable – Allows
placement at point
of use



CT Desiccant Cartridge Dryer

Order No. Description

130500 Desiccant Air Dryer wall mount

130501 Desiccant Air Dryer portable with stand

eCompressedair
251 Union Street
Westfield, MA 01085
Toll-Free: (866) 650-1937
www.eCompressedair.com

Easy Change Desiccant Air Dryer

- CT series desiccant air dryers remove water vapor from the compressed air down to a dew point of -40°F
- Quick change 10 lb. desiccant cartridge bag is made of a special fiber media which removes oil aerosols and solid particles down to 0.1 microns—meaning no need for coalescing or final filters

ACCESSORIES

130516

Regulator assembly



130523

2-Stage filter system
w/Regulator



130504

DC-30
Desiccant Cartridge



130505

MI-30
Humidity Indicator






Refer to Service Bulletin: SB-6-182

130500 (CT30) Desiccant Air Dryer 130501 (CT30-P) Portable Desiccant Air Dryer

SPECIFICATIONS

Air Inlet	½" NPT (Female)
Air Outlet	½" NPT (Female)
Air Flow Capacity	30 CFM
Maximum Operating Pressure	200 PSIG (14 Bar)
Maximum Temperature	150°F (65.6°C)
Humidity Indicator	Green: OK Yellow: Replace Desiccant
Water Vapor Removal	-40°F Dew point
Partical Removal	.01 micron
Manual Drain	Included

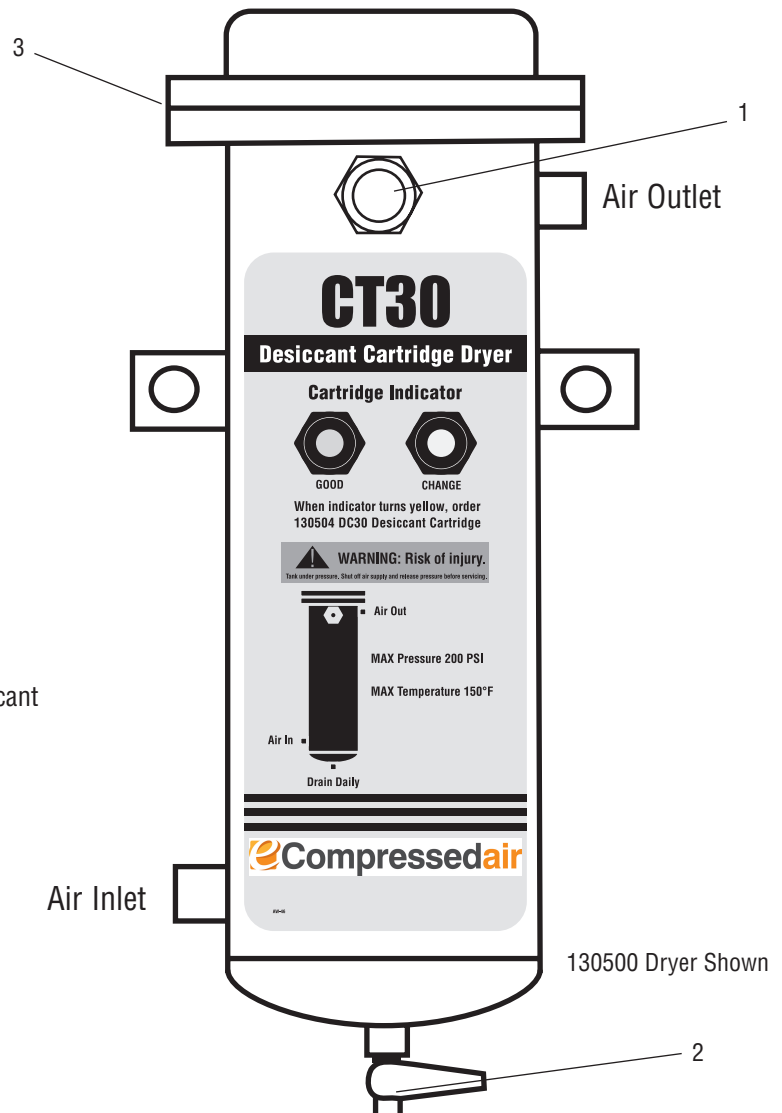

Ref. No.	Order No.	Description	Ind. Parts Req.
1	130505	Humidity Indicator (1 Humidity Indicator Paper included)	1
2	130511	Drain (Manual)	1
3	130510	Gasket	1
*4	130504	Desiccant Cartridge (not shown)	1

*The Material Safety Data Sheet (MSDS-52) is available upon request.