



# AC Series Aftercoolers

## Air-Cooled Aftercoolers for Your Compressed Air System

### Capacities (Maximum scfm with 5, 10, 15 and 20°F Approach)

	150°F Inlet				200°F Inlet				250°F Inlet				300°F Inlet				350°F Inlet			
	Approach (°F)				Approach (°F)				Approach (°F)				Approach (°F)				Approach (°F)			
	5	10	15	20	5	10	15	20	5	10	15	20	5	10	15	20	5	10	15	20
AC-10	17	35*	35*	35*	11	22	35	35*	8	16	20	35	6	12	19	26	5	10	15	21
AC-20	29	43*	43*	43*	17	36	43*	43*	12	27	35	43*	10	20	31	42*	8	16	26	35
AC-30	43	72	72*	72*	28	50	70	72*	22	35	50	70	18	32	45	57	15	28	39	50
AC-40	95	125*	125*	125*	66	111	125*	125*	52	88	100	125*	44	74	100	125	38	64	86	108
AC-60	34	58	79	99	25	43	59	74	21	36	50	62	18	31	42	52	16	27	38	47
AC-80	50	87	119	150	40	69	94	117	34	59	80	100	30	52	71	89	28	47	65	82
AC-100	81	138	190	235	61	105	142	177	51	87	120	150	43	75	102	127	40	69	94	116
AC-110	92	160	220	270	73	125	172	215	63	110	150	187	55	95	130	160	50	86	120	148
AC-120	160	275	380	425*	120	207	285	355	100	175	240	300	84	145	204	250	78	135	185	231
AC-130	184	318	440	480*	145	250	345	430	125	217	300	375	110	190	257	320	100	175	240	300
AC-140	210	384	520	605	175	375	430	500	160	300	400	464	135	250	340	396	125	235	305	355
AC-150	355	650	890	1025	308	560	760	880	290	545	725	840	245	450	605	701	225	410	540	625
AC-160	480	871	1178	1360	415	754	1020	1180	390	712	950	1100	320	588	785	910	280	520	690	780
AC-170	600	1090	1475	1710	520	950	1290	1460	490	900	1200	1380	405	735	980	1130	355	650	865	990
AC-180	790	1440	1950	2260	710	1290	1720	1950	660	1200	1600	1860	530	965	1290	1480	460	840	1135	1300
AC-190	980	1790	2420	2800	870	1580	2140	2460	820	1490	2000	2300	660	1210	1595	1840	572	1040	1400	1610
AC-200	1220	2220	3000	3470	1090	1980	2680	3100	1035	1880	2500	2870	784	1426	1980	2270	705	1290	1725	1980
AC-210	1450	2650	3580	4120	1295	2360	3200	3710	1243	2260	3000	3450	985	1794	2360	2715	840	1530	2040	2350
AC-220	1680	3064	4140	4800	1530	2785	3760	4320	1460	2660	3500	4015	1150	2090	2760	3200	950	1740	2350	2700

Capacities based on operating pressures of 80 psig to 125 psig. For capacities at pressures out of this range, consult factory. Maximum operating pressure: 250 psig. Maximum operating temperature: 350°F. Pressure drop less than 3 psi at 80-125 psig. \*Maximum flow for 3 psi pressure drop.

### Sizing Instructions:

1. Determine inlet temperature to aftercooler.
2. Determine desired outlet temperature. (Aftercooler outlet temperature = ambient temp. + approach)
3. Determine needed approach. (Approach = desired outlet temp. - ambient temp.)
4. Find flow (scfm) under column of correct inlet and approach temperatures and read left for model number.

### Standard Equipment

#### Models AC-10 through - 40

Ambient air flow: horizontal or vertical  
 Floor or suspended mounting  
 Steel cabinet with baked enamel finish  
 Copper tubed, aluminum finned core  
 Zinc chromate-plated steel fan guard  
 Open vented motor with thermal overload  
 NEMA frame: custom

Open vented motor  
 NEMA frame: custom on 115-1-60 ODP models, NEMA 48 on others  
 Thermal overload on 115-1-60 ODP models only

150; 145TC on AC-160; 182TC or 184 TC on AC-170, 184TC on AC-180, 213TC on AC-190, -200; 215TC on AC-210, -220.

#### Models AC-60 through - 130

Ambient air flow: horizontal  
 Floor or suspended mounting  
 Galvanized steel cabinet  
 Copper tube core with aluminum fins  
 Heavy gauge aluminum fan with steel hub  
 Steel fan guard with baked enamel finish

#### Models AC-140 through - 220

Ambient air flow: vertical  
 Steel legs with baked enamel finish  
 Aluminum core  
 Aluminum fan hub with polypropylene blades  
 Painted steel fan shroud  
 Steel fan guard with baked enamel finish  
 TEFC motor  
 NEMA frame: 56C on models AC-140, -

### Options & Accessories


Flex hose  
 Moisture separator  
 Automatic float drain  
 TEFC motor on models -60 through -130  
 Air motors on AC-140 through -220  
 Low temperature kits: Shut off fan(s) at 35°F outlet temperature.  
 FP-3 for AC-60-2 & 3 through AC-130-2 & 3  
 FP-4 for AC-140-7 through AC-220-7

**AC-10 & AC-20**  
(horizontal & vertical air flow)

**AC-30 & AC-40**  
(horizontal & vertical air flow)

**AC-60 through -130**

**AC-140 through -220**

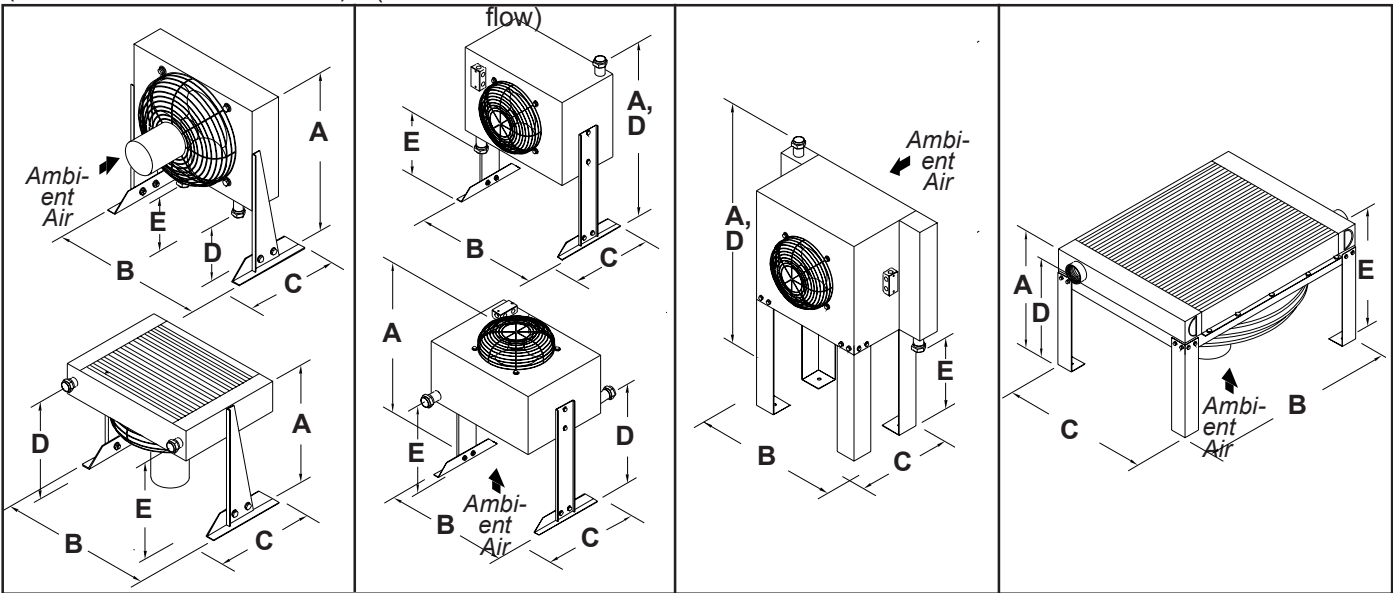

**Dimensions & Specifications (in. & lbs.)**

Model	A Ht	B Width	C Depth	D Ht to Inlet	E Ht to Outlet	I/O Conn.	Mtr (HP)	Voltage Options*	AC Wt.	Separator Model	I/O Conn.	Separator Wt.	Float Drain Model	Float Drain Wt.	Flex Hose Model	Flex Hose Length	Flex Hose Wt.
AC-10(H) <sup>1</sup>	22	20	12	8	8	½ NPT	¼	1	25	S-5-M <sup>3</sup>	2.9 ½	2	FD-1	2	FH-½	10	2
AC-10(V) <sup>1</sup>	16	20	14	15	15	½ NPT	¼	1	25	S-5-M <sup>3</sup>	2.9 ½	2	FD-1	2	FH-½	10	2
AC-20(H) <sup>1</sup>	22	20	12	8	8	½ NPT	¼	1	27	S-5-M <sup>3</sup>	2.9 ½	2	FD-1	2	FH-½	10	2
AC-20(V) <sup>1</sup>	16	20	14	15	15	½ NPT	¼	1	27	S-5-M <sup>3</sup>	2.9 ½	2	FD-1	2	FH-½	10	2
AC-30(H) <sup>1</sup>	42	26	15	42	19	1 NPT	¼	1	61	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1	12	2
AC-30(V) <sup>1</sup>	40	26	23	26	26	1 NPT	¼	1	61	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1	12	2
AC-40(H) <sup>1</sup>	42	26	15	42	19	1½ NPT	¼	1	67	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1½	16	3
AC-40(V) <sup>1</sup>	40	26	23	26	26	1½ NPT	¼	1	67	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1½	16	3
AC-60	51	31	18	51	22	1 NPT	¼	1,2,3,4,5	110	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1	12	2
AC-80	51	31	18	51	22	1½ NPT	¼	1,2,3,4,5	120	S-10-M <sup>3</sup>	6 1	2	FD-1	2	FH-1½	16	3
AC-100	51	44	18	51	22	1½ NPT	¼	1,2,3,4,5	140	S-20-M	5.3 1	2	FD-1	2	FH-1½	16	3
AC-110	51	44	18	51	22	1½ NPT	¼	1,2,3,4,5	145	S-20-M	5.3 1	2	FD-1	2	FH-1½	16	3
AC-120	54	48	18	54	22	2 NPT	¼ (2)	1,2,3,4,5	200	S-30-M	6 1½	2	FD-1	2	FH-2	18	4.5
AC-130	60	52	19	60	22	2 NPT	¼ (2)	1,2,3,4,5	300	S-30-M	6 1½	2	FD-1	2	FH-2	18	4.5
AC-140	34	26	19	32	32	2 NPT	1	6,7,8 <sup>2</sup>	120	S-60-M	13 2	2	FD-1	2	FH-2	18	4.5
AC-150	34	34	24	32	32	2 NPT	1.5	6,7,8 <sup>2</sup>	170	S-60-M	13 2	2	FD-1	2	FH-2	18	4.5
AC-160	36	41	28	33	33	3 NPT	1.5	6,7,8 <sup>2</sup>	330	S-170-M	27 3	3	FD-2 <sup>5</sup>	5	FH-3	22	12.5
AC-170	36	44	28	33	33	3 NPT	5, 3	3,7,8 <sup>2</sup>	450	S-170-M	27 3	3	FD-2 <sup>5</sup>	5	FH-3	22	12.5
AC-180	36	44	36	33	33	3 NPT	5	7,8 <sup>2</sup>	515	S-170-M	27 3	3	FD-2 <sup>5</sup>	5	FH-3	22	12.5
AC-190	36	54	39	33	33	4 NPT	7.5	7,8 <sup>2</sup>	600	S-260-M <sup>4</sup>	85 4	4	FD-2 <sup>5</sup>	5	FH-4	24	14.5
AC-200	36	52	45	33	33	4 NPT	7.5	7,8 <sup>2</sup>	625	S-260-M <sup>4</sup>	85 4	4	FD-2 <sup>5</sup>	5	FH-4	24	14.5
AC-210	36	54	54	33	33	4 NPT	10	7,8 <sup>2</sup>	645	S-260-M <sup>4</sup>	85 4	4	FD-2 <sup>5</sup>	5	FH-4	24	14.5
AC-220	36	54	58	33	33	4 NPT	10	7,8 <sup>2</sup>	750	S-260-M <sup>4</sup>	85 4	4	FD-2	5	FH-4	24	14.5

<sup>1</sup>Customer-mounted legs may be positioned for vertical or horizontal air flow.

<sup>2</sup>Request drawing for specifications with voltage option 8 (air motor).

<sup>3</sup>Separator models S-5-M and S-10-M also available with automatic float drain as S-5-AD and S-10-AD.

<sup>4</sup>Separator model S-260-M also available with 4" FLG connections as S-260-4F.

<sup>5</sup>Drain model FD-1 may be used for flows <1000 cfm.

**\*Voltage Options:**

To order, add the corresponding number of the desired voltage to the model number:

Ex: **AC-130-3** for 230-1-60

- 1 = 115-1-60 ODP      4 = 230-3-60 TEFC      7 = 230/460-3-60 TEFC
- 2 = 115-1-60 TEFC    5 = 460-3-60 TEFC      8 = air motor
- 3 = 230-1-60 TEFC    6 = 115/230-1-60 TEFC

**VAN AIR SYSTEMS**



2950 Mechanic Street  
Lake City, PA 16423  
Phone: (800) 840-9906  
Corporate Fax: (814) 774-0778  
Order Entry: (814) 774-3482  
www.vanairsystems.com